



REV.	REVISED DESCRIPTION	DATE	CHECKED
		2010.4.17	

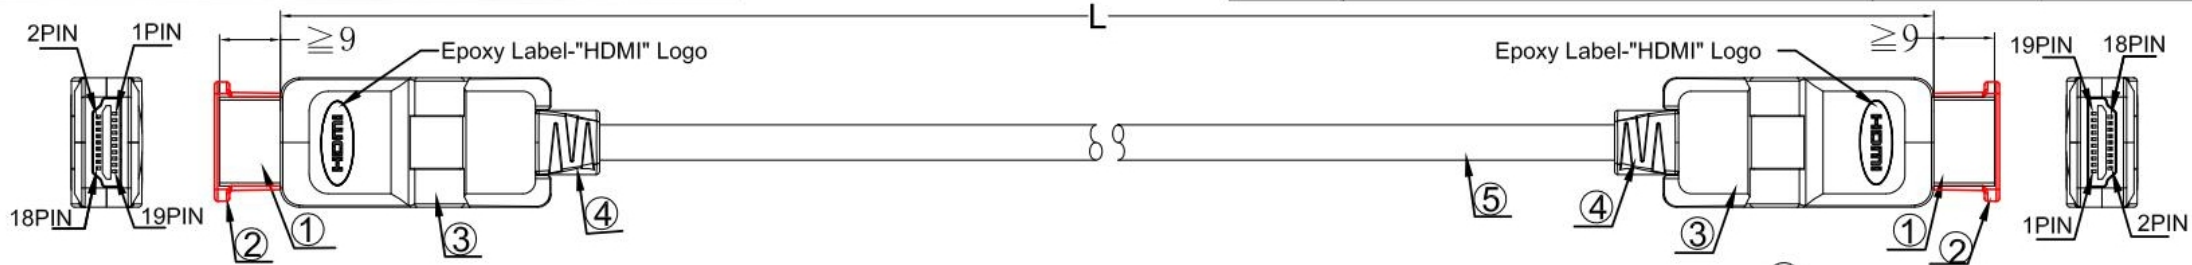


ERP NO.	LENGTH(L)	LENGTH(H)
A00-00821-0001	1000±30	130±10
A00-00821-0002	2000±50	130±10
A00-00821-0003	3000±80	130±10

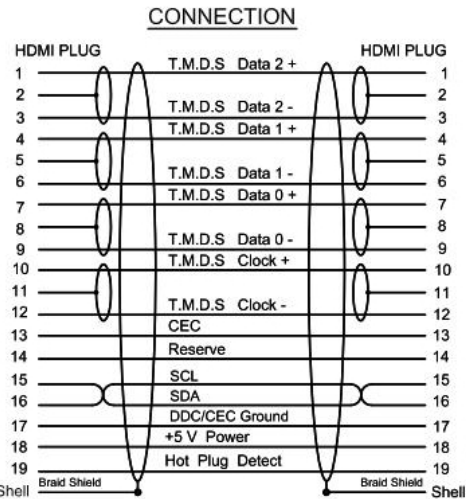

ELECTRIC TESTING:

1. 100% OPEN & SHORT TESTING
2. INSULATION RESISTANCE: $\geq 20 \text{ M}\Omega$
3. CONDUCTOR RESISTANCE: $\leq 5 \Omega$
4. VOLTAGE: 300V DC/0.1s

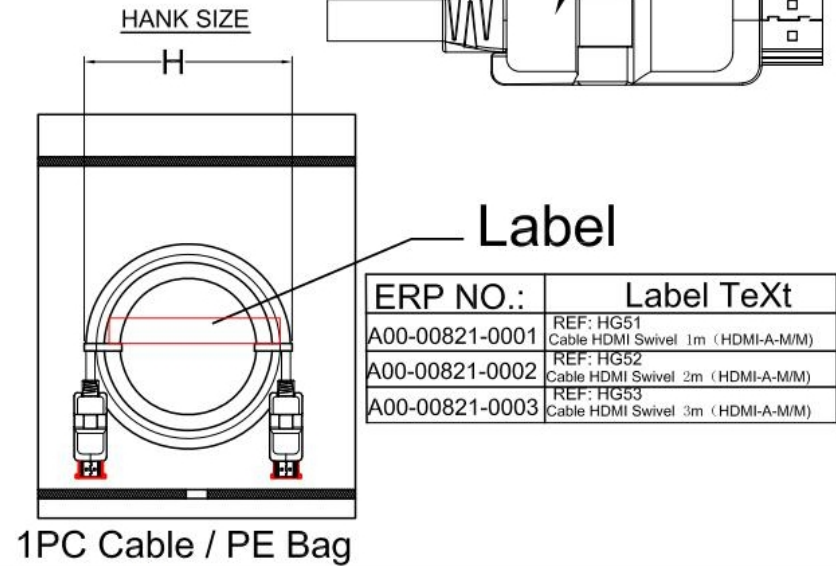

5	Cable Spec: {[(7/0.10Tc+FM-PE+SKIN)*1P+AL7/0.10Tc+Mylar]*4P+(7/0.10Tc+PP)*1(7/0.10Tc+PP)*5C+AL+16/9/0.10Tc}*1C OD.:5.5mm BlackPVCJacket(C18-27011)With White Words:High Speed HDMI R(logo) Cable E119932 UL(Logo) AWM 20276 80° C 30V VW-1 COPARTNER(C18-2701E*)
4	SR:PVC-Black(YT-1926)
3	Shell Black ABS(YT-1923/YT-1924)
2	Plastic Cap-Transparent(OPT-110-024)
1	HDMI Plug - Gold Plated Pin 3U"(P37-0045G)
NO	SPECIFICATION

TOLERANCES UNLESS OTHERWISE STATED

X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

ERP NO.:	A00-00821-000*	SAMPLE DWG NO.:	
DOC No.:		REVISION	1.0
CUSTOMER:	FAST	UNIT	mm
CUSTOMER P/N:	HDMI Cable A/M to A/M	SCALE	NO
DESCRIPTION	HDMI PLUG BOTH END(Swivel Cable)	PAGE NO	1/1
APPROVAL	CHECKED	DATE	2010.4.17
		DRAWN	YJ