



Rev	Modification Content	Date	Validate
A	the First Edition	2006-09-06	Cindy

**ROHS**

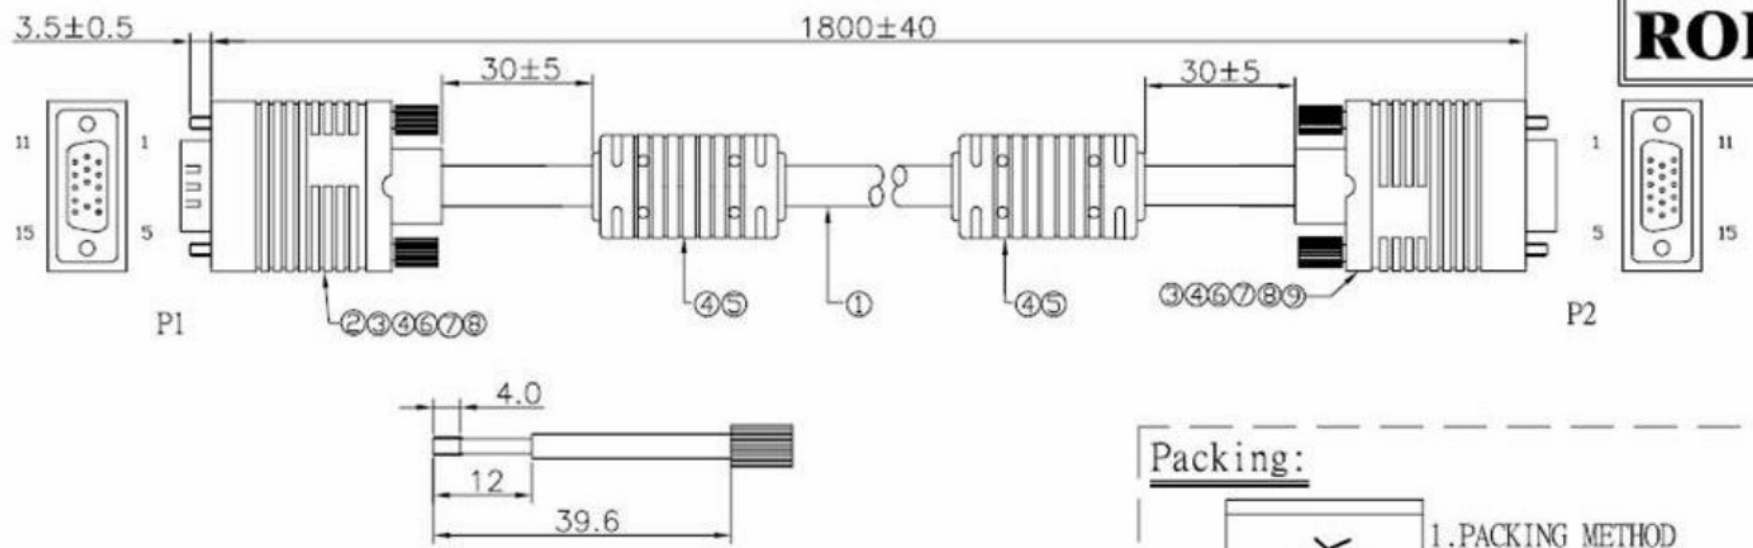


**Packing:**



1. PACKING METHOD LIKE LETTER "O"
2. BLACK TIE
3. PE BAG: 200mm\*250mm\*0.04mm
4. CARTON : 460\*300\*230mmA=A, CARTON側面的右上角貼"ROHS" LABEL: 绿底黑字: 30\*15mm.

9	Connect	HD-SUB15P FEMALE(BLACK) PIN GILD	1 pcs
8	Foil-Cu	W30*L60*0.06mm	2 pcs
7	Screw	4*47 N04-40unc-2A	4 pcs
6	Tube	PVC BLACK 熱縮管 OD=2.0mm L=8mm	6 pcs
5	Magnetic Core	17.5*28.5*9.5mm	2 pcs
4	Molding Out	PVC COLOR:BLACK BKCS-5114-55P	81 g
3	Molding In	PVC MOLDING IN	6.5 g
2	Connect	HD-SUB15P MALE(BLACK) PIN GILD THE NINTH PIN OF HOLLOW	1 pcs
1	Cable	UL2919 {[28AWG(7/0.127)*1C+(38/0.12) SPIRAL]*3CSPIRAL]*3C+28AWG*4C+AL/MY +DW(7/0.203)+50%BD(16/5/0.10)黑色 亮面齒狀 OD=8.0±0.2	1800mm
NO.	P/N	DESCRIPTION	QTY

**Pin Assignment:**

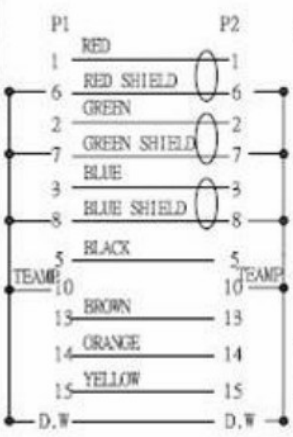

P/N		2919 3+4 15M/F BLACK L:1.8M		
Item		ARB1511524030180		
Drawn By	Cindy	Customer NO.	NO	N
Audited By		Unit: mm		
Date	2006-09-06	Rev.: 1.00	ME	