


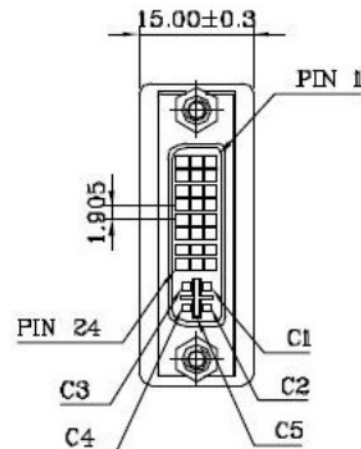


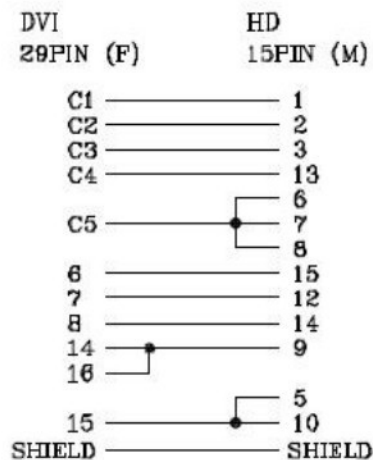

DVI29F

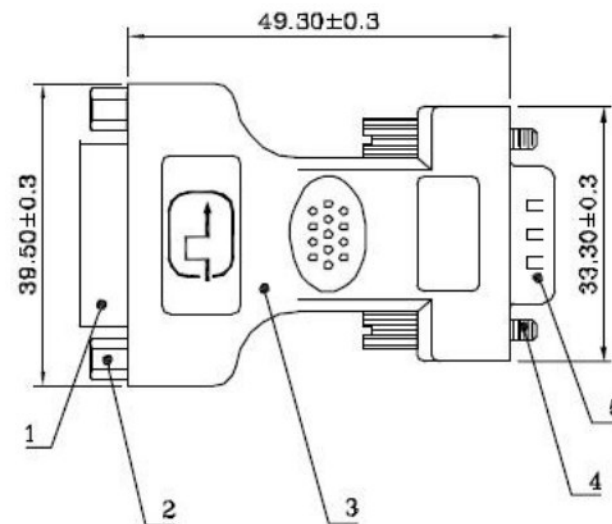

BACK SIDE

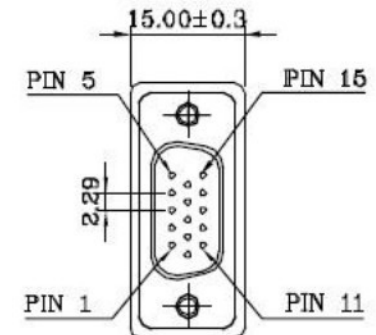

HD15M

•100% OPEN / SHORT / INSULATING TEST

•INSULATION TEST: 5MΩ

DV62

COMPONENTS	DESCRIPTION	Q'TY	2	1	NO.	DATE	MODIFICATION
1 DVI29F	DVI-Integrated 29P Female Connector Insulator: High Temperature Plastic UL-94V-0 Contact: Phosphor Bronze Metal Board Lock: Zinc Alloy With Tin Plating 150μ" Over Shell: Zinc Alloy With Nickel Plated 150μ" Over Contact Plating: G/F Selective Plating And Tin/LEAD On Solder Tail All With Nickel Underplating	1					APPROVED BY: DATE:
2 Screw Lock	UNC #4-40 Nickel Plated	2					CHECKED BY: DATE:
3 Hood	P.V.C Molded Color: Black Inner Molded With Copper Foil Shielded	1					DESIGN BY: DATE:
4 Jack Screw	UNC #4-40 Nickel Plated	2					PART NO:
5 HD15M	D-SUB High Density 2.29mm 15P Male Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Brass G/F Gold Plated	1					SCALE: X:1 UNIT: mm VERSION: B
			WT P/N:		70025-2915-0004-0111		
			DESCRIPTION:		DVI-I(F) to VGA(M) Adapter		
					DRAWN BY: DRAWING NO: 70025-2915-0004-0111		