

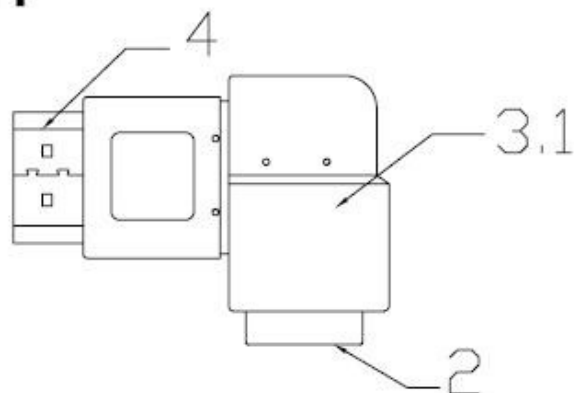



HDMI M- HDMI F

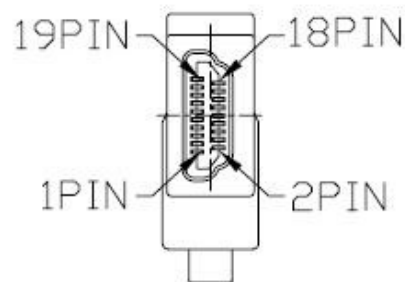

HDMI 19M

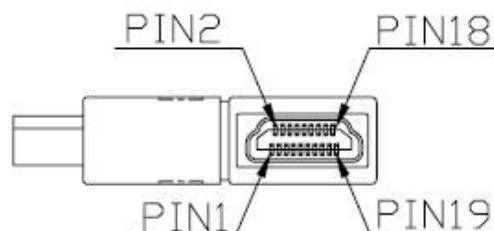


HDMI 19F

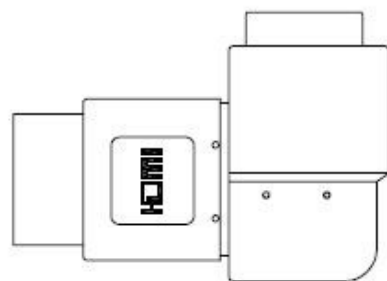

ELECTRICAL TEST:

1. CUTTENT RATING: DC 0.5A
2. WITHSTANDING VOLTAGE: DC 300VDC
3. INSULATION RESISTANCE: 5Mohm
4. CONDUCTIVE RESISTANCE: 10ohm

HDMI 19

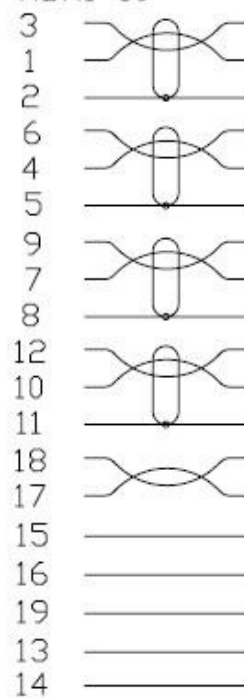

HDMI 19

3	(TMDS Data 2-)
1	(TMDS Data 2+)
2	(TMDS Data 2 Shield)
6	(TMDS Data 1-)
4	(TMDS Data 1+)
5	(TMDS Data 1 Shield)
9	(TMDS Data 0-)
7	(TMDS Data 0+)
8	(TMDS Data 0 Shield)
12	(TMDS Clock -)
10	(TMDS Clock +)
11	(TMDS Clock Shield)
18	(+5V Power)
17	(Ground)
15	(DCC Clock)
16	(DCC Data)
19	(Hot Plug Detect)
13	(CEC)
14	NO FUNCTION

SHELL

SHELL

4	HDMI A 19P MALE SOLDER TYPE CONTACT GOLD FLASH SHELL PLATED NICKEL	PCS	1
3	OUTTER MOLD PVC 55% (BLACK IN COLOR	PCS	1
2	HDMI A 19P FEMALE SOLDER TYPE CONTACT GOLD FLASH SHELL PLATED NICKEL	PCS	1
1	UL1007 30AWG STRANDEDx7 5CM	PCS	20
No.	DESCRIPTION	UNIT	Q'TY

A	ADAPTER HDMI A-TYPE MALE TO FEMALE	08/03/14
REV.	DESCRIPTION	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG.	±5°		
0.	±0.5		
.0	±0.3		
.00	±0.2		
SCALE:	NONE	UNIT:	mm
DRAWN:	De Yong	08/03/14	DRAWN NAME:
CHECKED:			競捷-HD49
APPROVED:			PRODUCT NO. ADP-HM-HFC-R
			FILE NAME: