


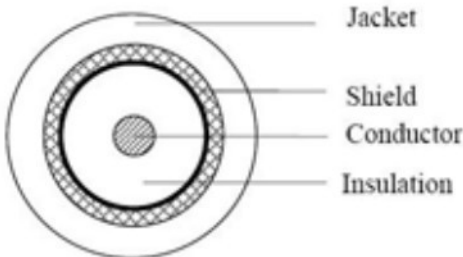

RC01/02

TECHNICAL SPECIFICATION						
CABLE TYPE		RG-58/U COAXIAL CABEL				
STRUCTURE						
Conductor	Composition(No./mm)	1/0.80mm				
	Material	Bare Copper Wire				
	Outside Diameter (mm)	0.80 ± 0.02mm				
Insulation	Material	Solid Polyethylene				
	Thickness (mm)	1.10 mm				
	Nom. Diameter(mm)	3.0 ± 0.1mm				
Shield	Material	Bare Copper Wire				
	Construction	16x7/0.12mm				
	Coverage	90%				
	Diameter(mm)	0.12±0.008mm				
Jacket	Material	PVC				
	Diameter(mm)	5.0 ± 0.1mm				
	Color	Black				
Printing	RG-58/U COAXIAL CABLE					
ELECTRICAL CHARACTERISTIC						
Impedance	Ω	50 ± 3				
Insulation Resistance	MΩ / km	1000 ↑				
Capacitance	pF/M	94 ± 3				
Attenuation	Frequency(MHz)	100	200	400	700	900
	dB/100M	14.8	22.3	32.8	45.9	52.8
Nice Fountain Industrial Co., Ltd.						
		DRWN.	Vivien Cheng			DRWN. No.:
		CHKD.	S. H. Liu			
		APPD.	Vincent Shen			Date: Sep. 05, 1996