


PLASTIC OPTICAL FIBER CABLE TOSLINK TO TOSLINK 15000 MM BLACK

CUSTOMER NO:	REMARK
TL08	CABLEMATIC


15000±150

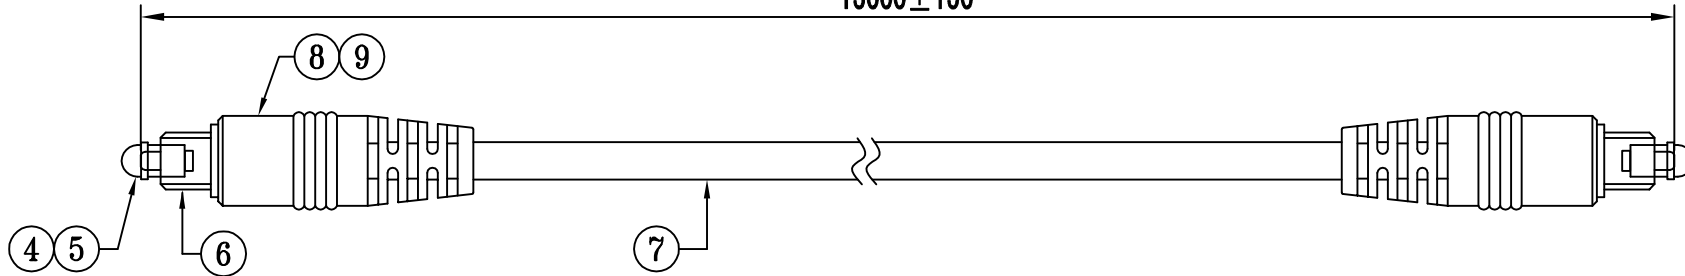

BILL OF MATERIAL



NO	ITEM	SPECIFICATION	Material	outer
1	conductor	Ø1.0 mm	PMMA	clear
2	insulation	Ø2.2±0.1mm	PE	black
3	outjacker	Ø6.0±0.1mm	PVC	black
4	cap	50P	PVC	clear
5	sleeve		Cu	golden
6	connector		PBT+30%	golden
7	plastical outjacker		PVC	black
8	shell	1G	Cu	
9	inner		PE	
10	cable			black

construction



NOTE :

- Loss ≤5.80dB
- 1PCS/PE BAG+LABEL
- RoHS COMPLIANT

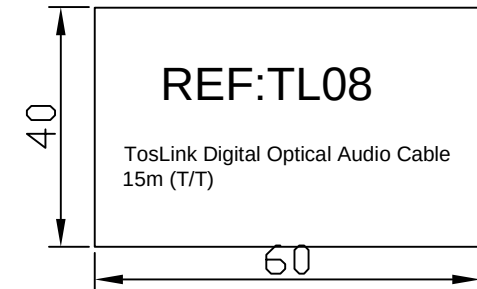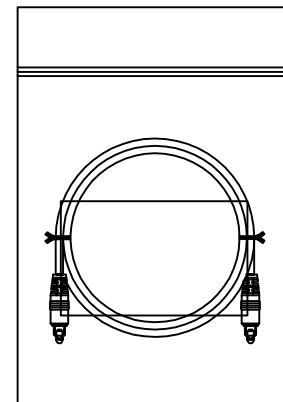

A		FIRST EDITION	WUZAN	27/12/2010
REV.	ECR	DESCRIPTION	C.N.	DATE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK CO-MPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.				
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		TITLE OPTICAL FIBER CABLE		
DIMENSIONS		TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm		±0.10mm		
30.01 TO 80.00mm		±0.13mm	DR. WUZAN	APPD.
80.01 TO 150.00mm		±0.15mm		
150.01mm		±0.20mm	PART NO.	
MATERIAL		MATERIAL	2602-1125	
FINISH		FINISH		
SCALE		SHEET	1 / 1	UNIT
		SIZE	MM	A4
		REV.	A	

WFM-ED-07B