




ELECTRICAL TEST:

1. CUTTENT RATING: DC 0.5A
2. WITHSTANDING VOLTAGE: DC 300VDC
3. INSULATION RESISTANCE: 50Mohm
4. CONDUCTIVE RESISTANCE: 2ohm

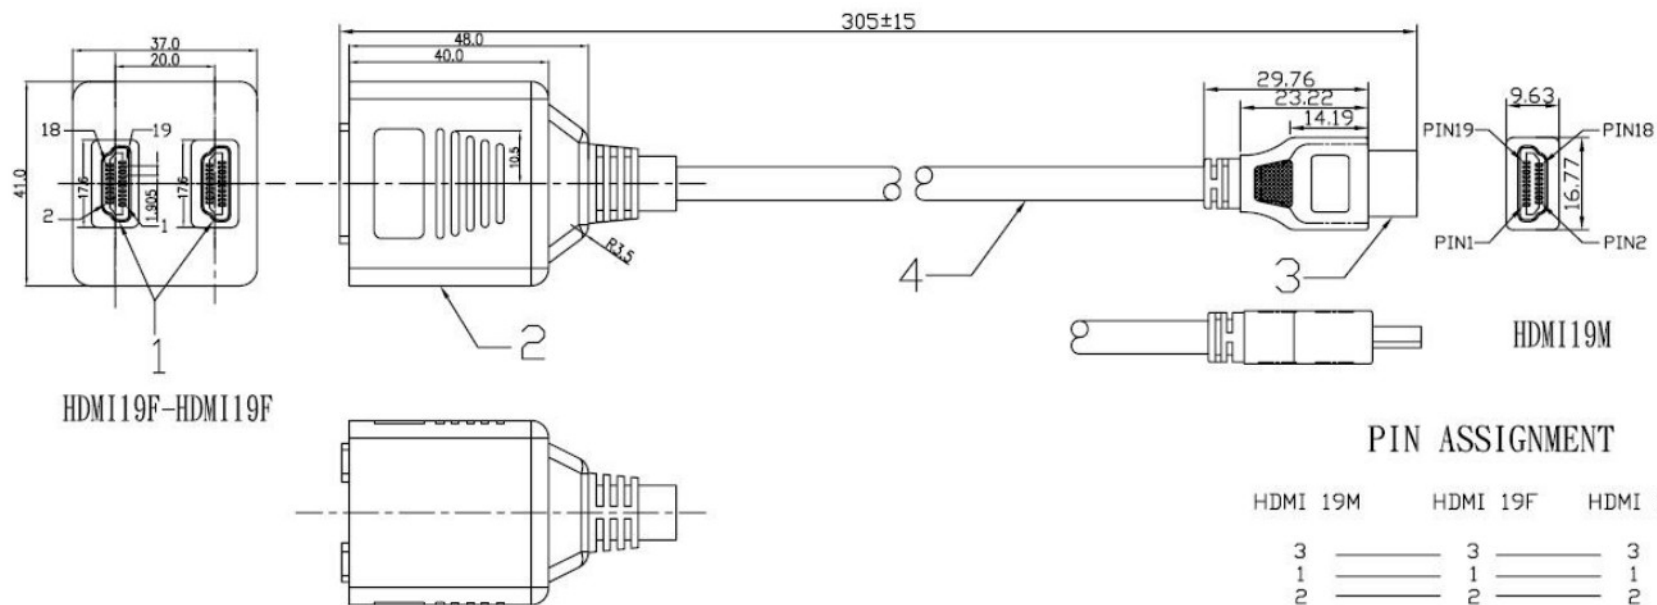

PIN ASSIGNMENT

HDMI 19M	HDMI 19F	HDMI 19F
3	3	3
1	1	1
2	2	2
6	6	6
4	4	4
5	5	5
9	9	9
7	7	7
8	8	8
12	12	12
10	10	10
11	11	11
18	18	18
17	17	17
15	15	15
16	16	16
19	19	19
13	13	13
SHELL	SHELL	SHELL

4	UL20276[(30AWG*1P+D+FAM)*4PCS+30AWG*1P+30AWG*5C]+AM+D+B	PCS	1
3	HDMI A MALE SOLDER TYPE CONTACT PLATED: GOLD	PCS	1
2	PVC MOLDED BLACK IN COLOR		
1	HDMI 19P FEMALE PLATED: GOLD	PCS	2
No.	DESCRIPTION	UNIT	Q'TY

A			
REV.	DESCRIPTION	DATE	

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0. ±0.5 .0 ±0.3 .00 ±0.2		SCALE: NONE UNIT: mm	
DRAWN CJB	07/3/22	DRAWN NAME: 競捷HD86	
CHECKED	/ /	PRODUCT NO.	
APPROVED	/ /	FILE NAME:	
		SIZE A4	REV. A