


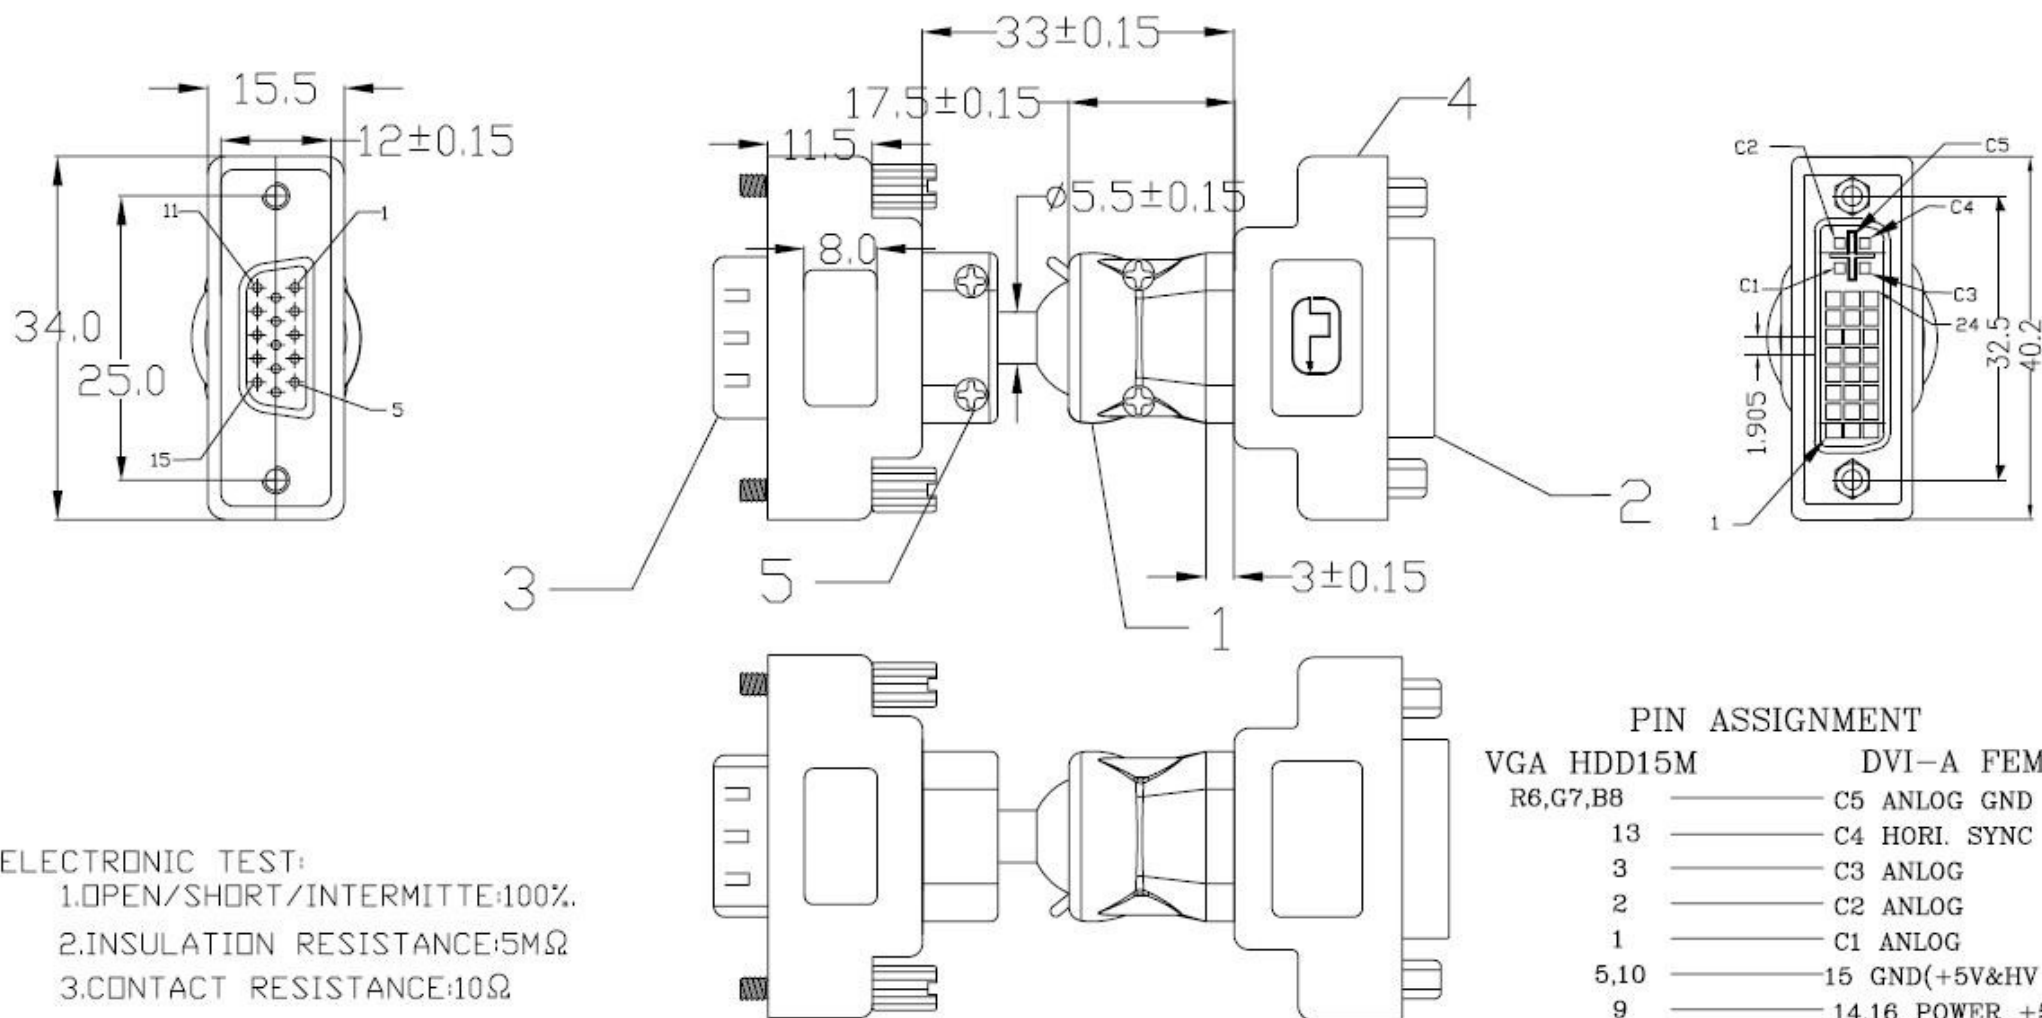

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTE:100%.
- 2.INSULATION RESISTANCE:5MΩ
- 3.CONTACT RESISTANCE:10Ω


PIN ASSIGNMENT

VGA HDD15M	DVI-A FEMALE
R6,G7,B8	C5 ANALOG GND
13	C4 HORI. SYNC
3	C3 ANALOG
2	C2 ANALOG
1	C1 ANALOG
5,10	15 GND(+5V&HV SYNC)
9	14,16 POWER +5V
14	8 VER. SYNC
12	7 DDC DATA
15	6 DDC CLOCK
SH	SH GROUND

5	4#40 SCREW	4	pcs
4	P.V.C MOLDING BLACK IN COLOR		
3	HIGH DENSITY 15P MALE SOLDER INSULATOR COLOR:BLACK SHELL NICKEL	1	pcs
2	DVI 24+5 FEMALE SOLDER CONTACT SHELL PLATED: NICKEL CONN G/F	1	pcs
1	ROTOR MADE OF ABS SHELL RED&WHITE	1	pcs
NO.	DESCRIPTION	Q'TY	UNITS

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG.	±5°		
0.	±0.5		
.0	±0.3		
.00	±0.2		
SCALE:	NONE	UNIT:	mm
DRAWN	XIEBO	09/03/17	DRAWN NAME:
CHECKED			競捷-R043
APPROVED			PRODUCT NO.
			FILE NAME:

09/03/17



SIZE

A4

REV.

C