


DVI24+1F-DVI24+1F

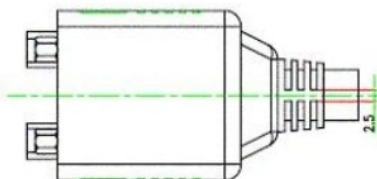

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTE:100%.
- 2.CURRENT RATING:1.5AMP.
- 3.INSULATION RESISTANCE:DC 500V AT 10ms R>50MΩ
- 4.CONTACT RESISTANCE:<1Ω .

SHIELD	SHIELD	SHIELD
PIN24	PIN24	PIN24
PIN23	PIN23	PIN23
PIN22	PIN22	PIN22
PIN21	PIN21	PIN21
PIN20	PIN20	PIN20
PIN19	PIN19	PIN19
PIN18	PIN18	PIN18
PIN17	PIN17	PIN17
PIN16	PIN16	PIN16
PIN15	PIN15	PIN15
PIN14	PIN14	PIN14
PIN13	PIN13	PIN13
PIN12	PIN12	PIN12
PIN11	PIN11	PIN11
PIN10	PIN10	PIN10
PIN9	PIN9	PIN9
PIN7	PIN7	PIN7
PIN6	PIN6	PIN6
PIN5	PIN5	PIN5
PIN4	PIN4	PIN4
PIN3	PIN3	PIN3
PIN2	PIN2	PIN2
PIN1	PIN1	PIN1
DVI 24+1M	DVI 24+1F	DVI 24+1F

6	THUMB NUT #4-40UNC PLATED:GOLD	PCS	1
5	THUMB SCREW #4-40UNC PLATED:GOLD ABS COLOR:BLACK	PCS	1
4	DVI 24+1 MALE SOLDER COLOR:BLACK SHELL PLATED:GOLD	PCS	1
3	UL2919 30AWG*3C+24AWG*9C+AM+D+B OD8.5 COLOR:BLACK		
2	PVC MOLDED BLACK IN COLOR		
1	DVI 24+1 FEMALE PLATED: GOLD	PCS	2
No.	DESCRIPTION	UNIT	Q'TY

A		06/06/15	APPROVED	SCALE: 1:1	UNIT: mm	DRAWN NAME: SPL-D25M-Fx2-1FT
REV.	DESCRIPTION	DATE	SIZE A4	REV. A	FILE NAME:	

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.5
.0	±0.3
.00	±0.2
SCALE:	1:1
UNIT:	mm
DRAWN	ERIC XU
CHECKED	/ /
APPROVED	/ /
DATE	06/06/15
SIZE	A4
REV.	A